



Nile Company

For Industry & Equipment

Company Profile | Product Catalogue
2025

30 years of excellence
٣٠ عاماً من الريادة

Content Compass

• Message from our CEO	4
• Background Information	
• Who are we?	6
• Mission	8
• Vision	9
• Core values	10
• Where are we?	12
• Recent milestone	13
• Advantages of Rolling Shutter	14

• Product Catalogue	
• Rolling Shutters	
• Foam Injected Aluminium Rolling Shutter	15
• NGS	16
• BK	18
• TERA	20
• CLS 5.5	22
• PIO	24
• ECO	26
• Foam Injected Security Rolling Shutter	29
• NGSS	30
• Zinconium	32
• New Zinconium	34
• Security	36
• Aluminium Rolling Shutter	39
• Safe shutter	40
• M.Safe shutter	42
• Boxes for Rolling Shutters	45
• Tubes and side channel usage guide	57
• Motorisation systems manual	61
• Somfy	62
• Simu	64
• Nile&asa	66
• A-OK	68
• Accessories	71
• Contact Us	78

Message from the CEO

It brings me immense joy to welcome you to the profile of Nile Company for Industry and Equipment (Nile Co.), a company built on passion and a relentless drive for excellence. As one of the leading rolling shutter manufacturers in the Middle East, we boast a scalable factory and cutting-edge production lines, allowing us to deliver an unparalleled range of solutions.

Nile Co. isn't just a business; it's my personal passion and constant addiction. For years, I've poured my heart and soul into creating a company that delivers exceptional rolling shutters for every need. We've grown into a diverse family of products. But here's the thing – we don't just offer products; we offer full-fledged solutions. Our team works tirelessly to understand your specific needs and tailor the perfect rolling shutter system for your need.

The impressive scale of our factory is only outmatched by the dedication of our team. From our talented engineers to our skilled production personnel and exceptional customer service representatives, every member of the family shares my passion for quality and innovation. We foster a collaborative environment that thrives on continuous improvement, ensuring our rolling shutters remain at the forefront of the industry.

This dedication has propelled Nile Co. to achieve a strong international presence. We're proud to partner with architects, builders, and property owners across the globe, delivering security, functionality, and aesthetic appeal to projects of all sizes. Each successfully completed project fills me with immense pride, knowing that a piece of our passion now protects and enhances a building somewhere in the world.

Thank you for considering Nile Company for Industry and Equipment. Let us transform your vision into a reality with the perfect rolling shutter solution. We look forward to exceeding your expectations.

Sincerely,

ENG. BOURHAN KANJO
Founder and CEO



Who we are?

Pioneering Innovation Since 1994

Nile Company for Industry and Equipment, established in 1994, is the undisputed leader in rolling shutters, proudly headquartered in Egypt. We weren't just the first; we were the visionary force that identified the need for rolling shutters and educated the market through our extensive distribution network. Today, we hold the majority market share in Egypt and are a dominant player across the Middle East and Africa.

Investing in Knowledge: The Nile Academy Advantage

Our dedication extends beyond manufacturing. The Nile Academy offers training programs for clients, distributors, and installers, fostering a culture of knowledge and expertise within the rolling shutter industry.



+30
Product



+500
Employees



+12
Production lines



+2000
client

Unmatched Quality and Comprehensive Solutions

At Nile Company, our unwavering commitment to excellence is reflected in everything we do:

- **Unmatched Quality:** We are dedicated to providing the highest quality rolling shutters available. Our state-of-the-art factory, equipped with 12+ cutting-edge production lines utilizing the latest European technology, guarantees exceptional performance and durability.
- **Extensive Product Range:** With over 19+ products, we offer the most comprehensive selection of rolling shutters in the region. Whether you require high-security solutions, fire-resistant options, or aesthetically pleasing shutters for your home or business, we have the perfect fit.
- **Full Solutions Approach:** We go beyond just shutters. We provide all related accessories and expert guidance to ensure a complete, integrated rolling shutter system for your specific needs.

A Strong Workforce: The Backbone of Our Success

Our success story wouldn't be possible without our dedicated team. Nile boasts a workforce of over 500 highly skilled employees with a remarkably low turnover rate. This stability translates into a deep understanding of our products and processes, ensuring exceptional service and consistent quality for our ever-growing 2000+ client base.

Partnering for Lasting Security

Nile Company for Industry and Equipment is more than just a manufacturer; we are your trusted partner for rolling shutter solutions. We are committed to exceeding expectations and delivering innovative solutions that enhance the security, functionality, and aesthetics of your projects.

Join us

as we continue to lead the rolling shutter revolution, shaping the landscape not only in Egypt but across the globe.



Our Mission

To solidify our leadership in Egypt and expand our global footprint by empowering customers with innovative rolling shutter solutions that deliver exceptional security, enhance functionality, and contribute to a more sustainable future.

Our Vision

To be the undisputed global leader in rolling shutter technology, recognized for our unwavering commitment to security, innovation, and sustainable building practices.

Core Values

From Integrity to Customer Focus: "Customer-Centric Integrity: We build trust by prioritizing customer needs and conducting business with honesty and transparency."

From Quality to Excellence: "Unwavering Commitment to Excellence: We deliver exceptional quality in every rolling shutter and strive for continuous improvement."

From Perseverance to Relentless Innovation: "Relentless Innovation: We are dedicated to overcoming challenges and pioneering new technologies in rolling shutters."



Where we are?



Nigeria



Sierra Leone



Liberia



Cote d'Ivoire



Libya



Tunis




KSA



Algeria



Oman

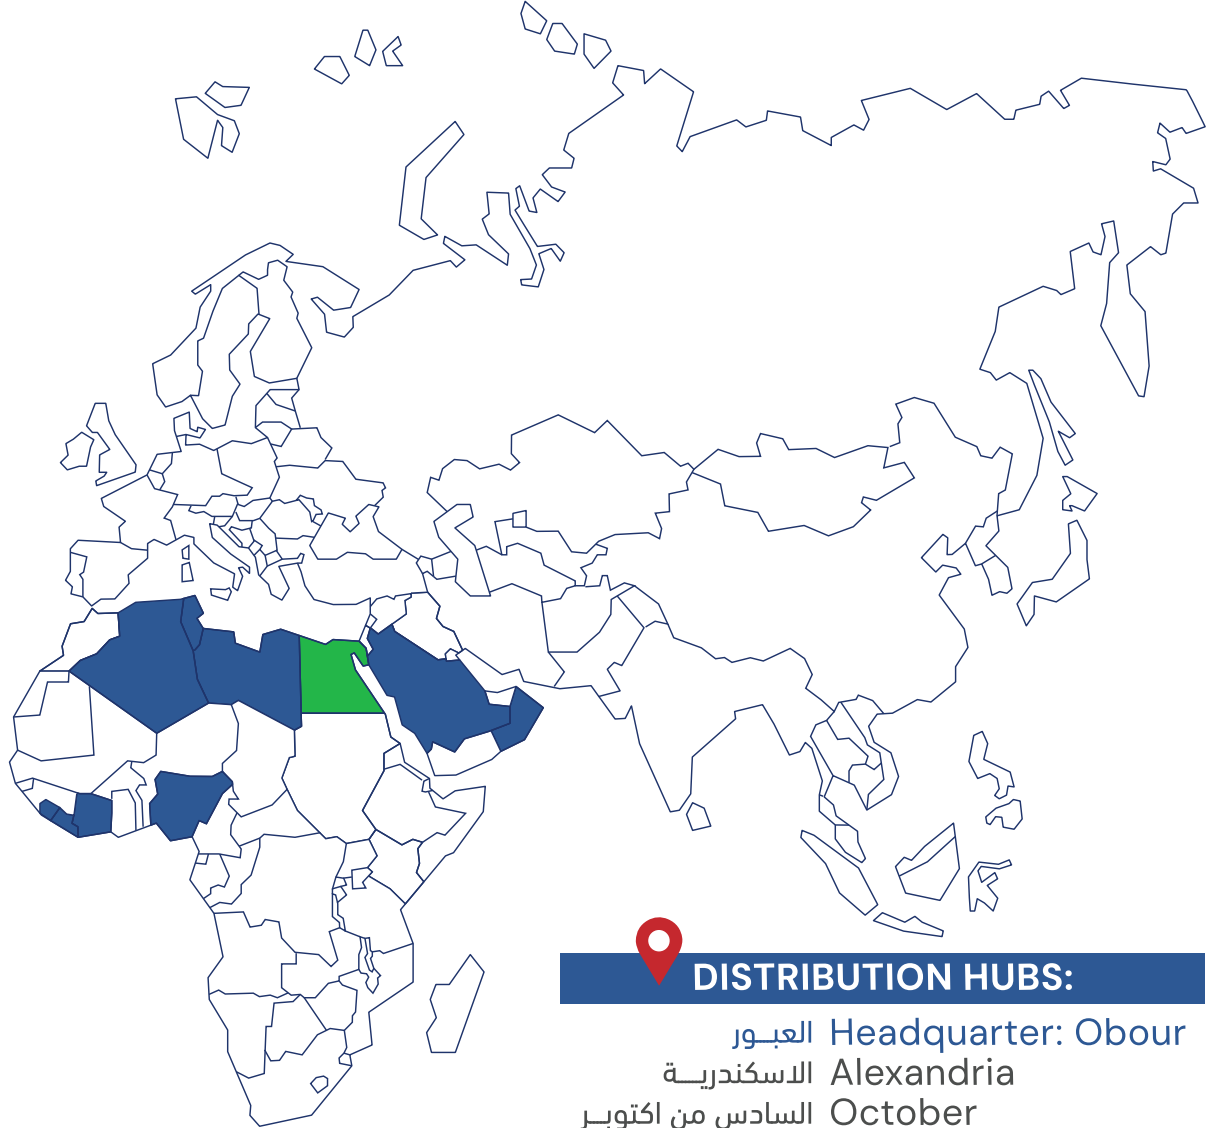

DISTRIBUTION HUBS:

العبر Headquarter: Obour
الاسكندرية Alexandria
السادس من اكتوبر October

Recent Milestone

Nile Company, the leading Egyptian manufacturer of rolling shutters, is proud to announce a significant milestone in its journey towards global leadership. In 2024, we officially opened our first assembly warehouse in Abuja, Nigeria, marking our historic entry into the African market.

This strategic expansion allows Nile Company to:

Establish a strong geographic presence in Africa: Our new warehouse in Abuja positions us to efficiently serve the growing demand for high-quality rolling shutters across the continent.

Exploit the market gap: By introducing our innovative and reliable solutions, we aim to bridge the gap for exceptional rolling shutters in the African market.

Deliver exceptional customer service: The new facility allows us to provide faster turnaround times, reduced shipping costs, and enhanced customer support for our Nigerian clients.

This expansion signifies Nile Company's unwavering commitment to growth and our dedication to becoming the undisputed global leader in rolling shutter technology. We are confident that our entry into Africa will not only benefit Nigerian customers but also contribute to the overall development and security of the continent's infrastructure.

The Powerful Advantages of Nile Rolling Shutters



Uncompromising Security:

Fortress-like Protection: Impenetrable Strength: Nile rolling shutters boast robust construction, acting as a formidable deterrent against break-in attempts. Their design safeguards your valuable property.



Enhanced Privacy:

Peace of Mind and Control: Maintain complete control over privacy with Nile rolling shutters. Block unwanted views and create a secluded environment whenever desired.



Sun Protection:

Cooler Interiors, Reduced Costs: Nile rolling shutters effectively shield your space from the harsh sun. Enjoy a cooler interior environment and potentially lower energy bills associated with air conditioning.



Energy Savings:

Smarter Insulation: Nile rolling shutters act as an additional layer of insulation, helping to retain cool air in the summer and warm air in the winter. This can lead to significant energy savings throughout the year.




Noise Reduction:

A Tranquil Oasis: Nile rolling shutters provide a valuable barrier against external noise pollution. Create a peaceful and serene environment for work, relaxation, or sleep.



Water Protection:

Weatherproof Security: Nile rolling shutters offer an additional layer of defense against the elements. They can help to shield your property from windblown rain, hail, and dust.

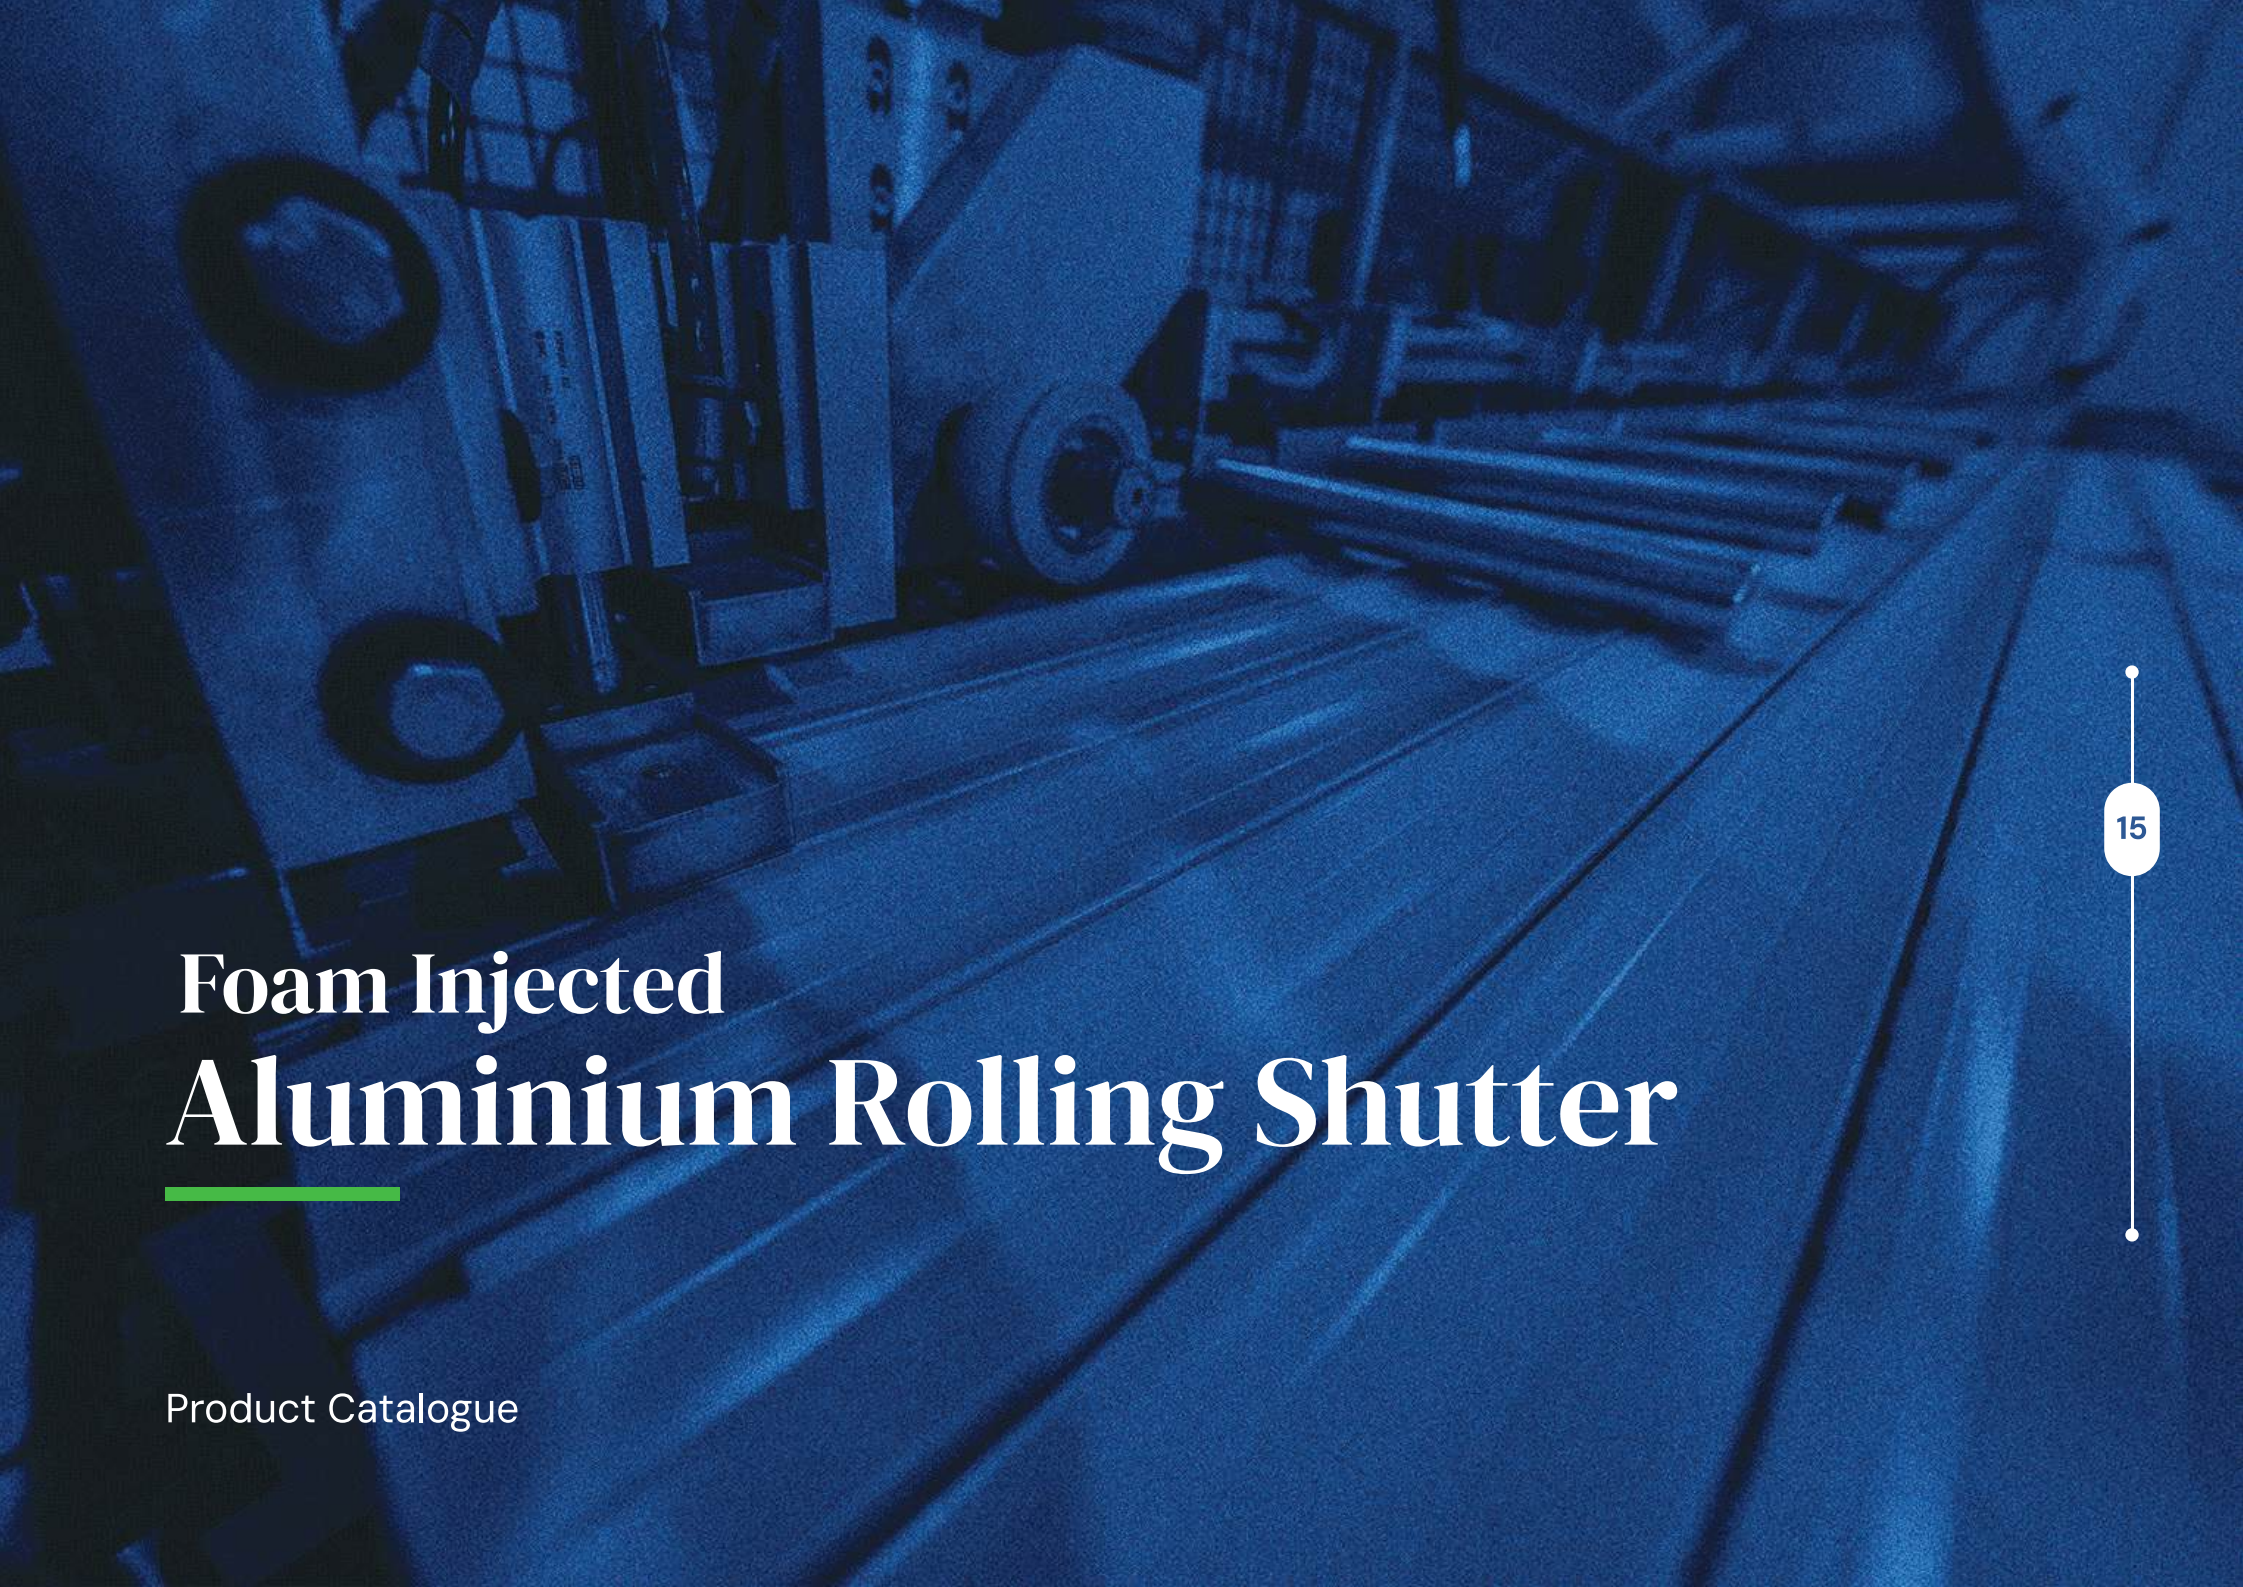


Foam Injected Aluminium Rolling Shutter

Product Catalogue



16

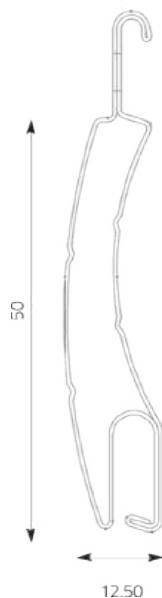

Product Specs

البيانات التقنية

Aluminum Thickness	0.46 mm	سمك الألومنيوم
Slat height	50 mm	مقاس الشريحة
Maximum recommended width	4 m	اقصي عرض (فوم عادي)
Maximum recommended width (High Density Foam)	5 m	اقصي عرض (فوم عالي الكثافة)
Weight (Normal density)	5.0 kg/m ²	الوزن للمتر (فوم عادي)
Weight (High density)	5.60 kg/m ²	الوزن للمتر (فوم عالي الكثافة)
No. of slats LMT / Height	20 slats	عدد الشرائح للمتر
locking type	Self	نوع التحبيس

اختيار مقاس الصندوق (وفقا للارتفاع)

Boxes Size مقاس العلب	Tube 6 cm طنبور 6 سم	Tube 7 cm طنبور 7 سم	Tube 9 cm طنبور 9 سم
18 cm	125 cm	100 cm	—
20.5 cm	150 cm	150 cm	100 cm
22.5 cm	250 cm	240 cm	150 cm
25 cm	300 cm	300 cm	240 cm
30 cm	400 cm	400 cm	300 cm


Color: Dark Gray
Code: 7015
اللون: رمادي غامق
الكود: 7015

Color: Beige
Code: 1013
اللون: بيج فاتح
الكود: 1013

Color: White
Code: 9010
اللون: ابيض
الكود: 9010



**BK
5**



Product Specs

Aluminum Thickness	0.27 mm	سمك الألومنيوم
Slat height	50 mm	مقاس الشريحة
Maximum recommended width	3.5 m	اقصى عرض (فوم عادي)
Maximum recommended width (High Density Foam)	4.50 m	اقصى عرض (فوم عالي الكثافة)
Weight (Normal density)	2.5 kg/m ²	الوزن للمتر (فوم عادي)
Weight (High density)	3.3 kg/m ²	الوزن للمتر (فوم عالي الكثافة)
No. of slats LMT / Height	20 slats	عدد الشرائح للمتر
locking type	Plastic lock / Self	نوع التحبيس

Recommended box size (according to height) (وفقا للارتفاع)


Boxes Size مقاس العلب	Tube 6 cm طنبور 6 سم	Tube 7 cm طنبور 7 سم	Tube 9 cm طنبور 9 سم
15 cm	125 cm	100 cm	—
16.5 cm	150 cm	120 cm	—
18 cm	200 cm	175 cm	130 cm
20.5 cm	275 cm	225 cm	200 cm
22.5 cm	330 cm	300 cm	250 cm
25 cm	400 cm	400 cm	330 cm



Color: Black
Code: 9005
اللون: اسود
الكود: 9005



Color: DarkGray
Code: 7015
اللون: رمادي غامق
الكود: 7015




Color: Beige
Code: 1013
اللون: بيج
الكود: 1013



Color: White
Code: 9010
اللون: ابيض
الكود: 9010



TERA 5.8



Product Specs

Aluminum Thickness	0.3 mm	سمك الألومنيوم
Slat height	58 mm	مقاس الشريحة
Maximum recommended width	4.5 m	اقصي عرض (فوم عادي)
Maximum recommended width (High Density Foam)	5 m	اقصي عرض (فوم عالي الكثافة)
Weight (Normal density)	2.85 kg/m ²	الوزن للمتر (فوم عادي)
Weight (High density)	4.1 kg/m ²	الوزن للمتر (فوم عالي الكثافة)
No. of slats LMT / Height	17.24 slats	عدد الشرائح للمتر
locking type	Plastic lock / Self	نوع التحبيس ذاتي / حبسة بلاستيك

اختيار مقاس الصندوق (وفقا للارتفاع)

Boxes Size مقاس العلب	Tube 6 cm + Ring طنبور 6 سم + رينج	Tube 7 cm طنبور 7 سم	Tube 9 cm طنبور 9 سم
16.5 cm سم	90 cm سم	90 cm سم	—
18 cm سم	160 cm سم	160 cm سم	—
20.5 cm سم	220 cm سم	220 cm سم	200 cm سم
22.5 cm سم	280 cm سم	280 cm سم	250 cm سم
25 cm سم	340 cm سم	340 cm سم	330 cm سم
30 cm سم	370 cm سم	370 cm سم	350 cm سم

Color: Gray
Code: 7015

اللون: رمادي
الكود: 7015

Color: Beige
Code: 1013


اللون: بيج فاتح
الكود: 1013

Color: White
Code: 9010

اللون: ابيض
الكود: 9010



WIN 5.5

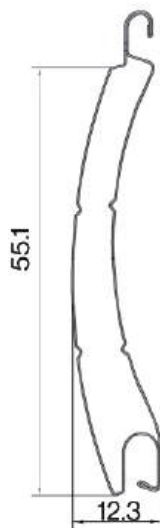

22

Product Specs

البيانات التقنية


Aluminum Thickness	0.27 mm	سمك الألومنيوم
Slat height	55 mm	مقاس الشريحة
Maximum recommended width	4 m	اقصى عرض (فوم عادي)
Maximum recommended width (High Density Foam)	4.5 m	اقصى عرض (فوم عالي الكثافة)
Weight (Normal density)	2.5 kg/m ²	الوزن للمتر (فوم عادي)
Weight (High density)	3.6 kg/m ²	الوزن للمتر (فوم عالي الكثافة)
No. of slats LMT / Height	18.18 slats	عدد الشرائح للمتر
locking type	Plastic lock	نوع التحبيس

اختيار مقاس الصندوق (وفقا للارتفاع)

Boxes Size مقاس العلب	Tube 6 cm طنبور 6 سم	Tube 7 cm طنبور 7 سم	Tube 9 cm طنبور 9 سم
15 cm	105 cm	105 cm	—
16.5 cm	115 cm	115 cm	—
18 cm	160 cm	160 cm	—
20.5 cm	220 cm	220 cm	190 cm
22.5 cm	280 cm	270 cm	230 cm
25 cm	360 cm	352 cm	341 cm
30 cm	490 cm	485 cm	470 cm



Color: Dark Gray اللون: رمادي غامق
Code: 7015 الكود: 7015



Color: Beige اللون: بيج فاتح
Code: 1013 الكود: 1013



Color: White اللون: ابيض
Code: 9010 الكود: 9010



**CLS
5.5**



24



11.70

Product Specs

البيانات التقنية

Aluminum Thickness	0.27 mm	سمك الألومنيوم
Slat height	55 mm	مقاس الشريحة
Maximum recommended width	4 m	اقصي عرض (فوم عادي)
Maximum recommended width (High Density Foam)	4.50 m	اقصي عرض (فوم عالي الكثافة)
Weight (Normal density)	3 kg/m ²	الوزن للمتر (فوم عادي)
Weight (High density)	3.75 kg/m ²	الوزن للمتر (فوم عالي الكثافة)
No. of slats LMT / Height	18.18 slats	عدد الشرائح للمتر
locking type	Plastic lock	نوع التحبيس

اختيار مقاس الصندوق (وفقا للارتفاع)

Boxes Size مقاس العلب	Tube 6 cm طنبور 6 سم	Tube 7 cm طنبور 7 سم	Tube 9 cm طنبور 9 سم
18 cm	150 cm	150 cm	—
20.5 cm	200 cm	200 cm	160 cm
22.5 cm	270 cm	260 cm	210 cm
25 cm	350 cm	350 cm	280 cm
30 cm	450 cm	450 cm	350 cm



Brown
Code: 8019



Wooden
خشابي




Dark Beige
Code: 1015



Silver
Code: 9006



Dark Gray
Code: 7015



Beige
Code: 1013



White
Code: 9010

ابيض
الكود:



P10
4.25



Product Specs

Aluminum Thickness	0.27 mm	سمك الألومنيوم
Slat height	42.50 mm	مقاس الشريحة
Maximum recommended width	3 m	اقصي عرض (فوم عادي)
Maximum recommended width (High Density Foam)	3.50 m	اقصي عرض (فوم عالي الكثافة)
Weight (Normal density)	2.55 kg/m ²	الوزن للمتر (فوم عادي)
Weight (High density)	3.32 kg/m ²	الوزن للمتر (فوم عالي الكثافة)
No. of slats LMT / Height	23.50 slats	عدد الشرائح للمتر
locking type	Plastic lock	نوع التحبيس

اختيار مقاس الصندوق (وفقا للارتفاع)

Boxes Size مقاس العلب	Tube 4 cm طنبور 4 سم	Tube 6 cm طنبور 6 سم	Tube 7 cm طنبور 7 سم
15 cm سم	115 cm سم	105 cm سم	- cm سم
16.5 cm سم	160 cm سم	150 cm سم	130 cm سم
18 cm سم	215 cm سم	210 cm سم	195 cm سم
20.5 cm سم	280 cm سم	270 cm سم	255 cm سم
22.5 cm سم	320 cm سم	310 cm سم	290 cm سم
25 cm سم	350 cm سم	350 cm سم	350 cm سم
30 cm سم	400 cm سم	400 cm سم	400 cm سم



Black
Code: 9005
اسود
الكود:



Brown
Code: 8019
بنى
الكود:



Wooden
خشابي
الكود:




Dark Beige
Code: 1015
بيج غامق
الكود:



Silver
Code: 9006
فضي
الكود:



Dark Gray
Code: 7015
رمادي غامق
الكود:




Beige
Code: 1013
بيج فاتح
الكود:



White
Code: 9010
ابيض
الكود:



ECO 3.9

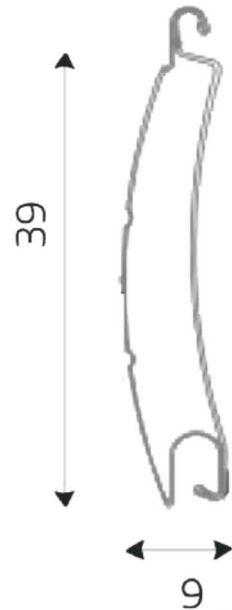

Product Specs

Aluminum Thickness	0.27 mm مم	سمك الألومنيوم
Slat height	39 mm مم	مقاس الشريحة
Maximum recommended width	2.5 m م	اقصي عرض (فوم عادي)
Weight (Normal density)	2.35 kg/m ² كجم/م ²	الوزن للمتر (فوم عادي)
No. of slats LMT / Height	25.64 slats شريحة	عدد الشرائح للمتر
locking type	Plastic lock حبسة بلاستيك	نوع التحبيس

اختيار مقاس الصندوق (وفقا للارتفاع) Recommended box size (according to height)


Boxes Size مقاس العلب	Tube 4 cm طنبور 4 سم	Tube 6 cm طنبور 6 سم
15 cm سم	175 cm سم	140 cm سم
16.5 cm سم	200 cm سم	160 cm سم
18 cm سم	250 cm سم	250 cm سم



Color: Wooden اللون: خشابي



Color: Dark Beige اللون: بيج غامق الكود: 1015




Color: Beige اللون: بيج الكود: 1013



Color: White اللون: ابيض الكود: 9010



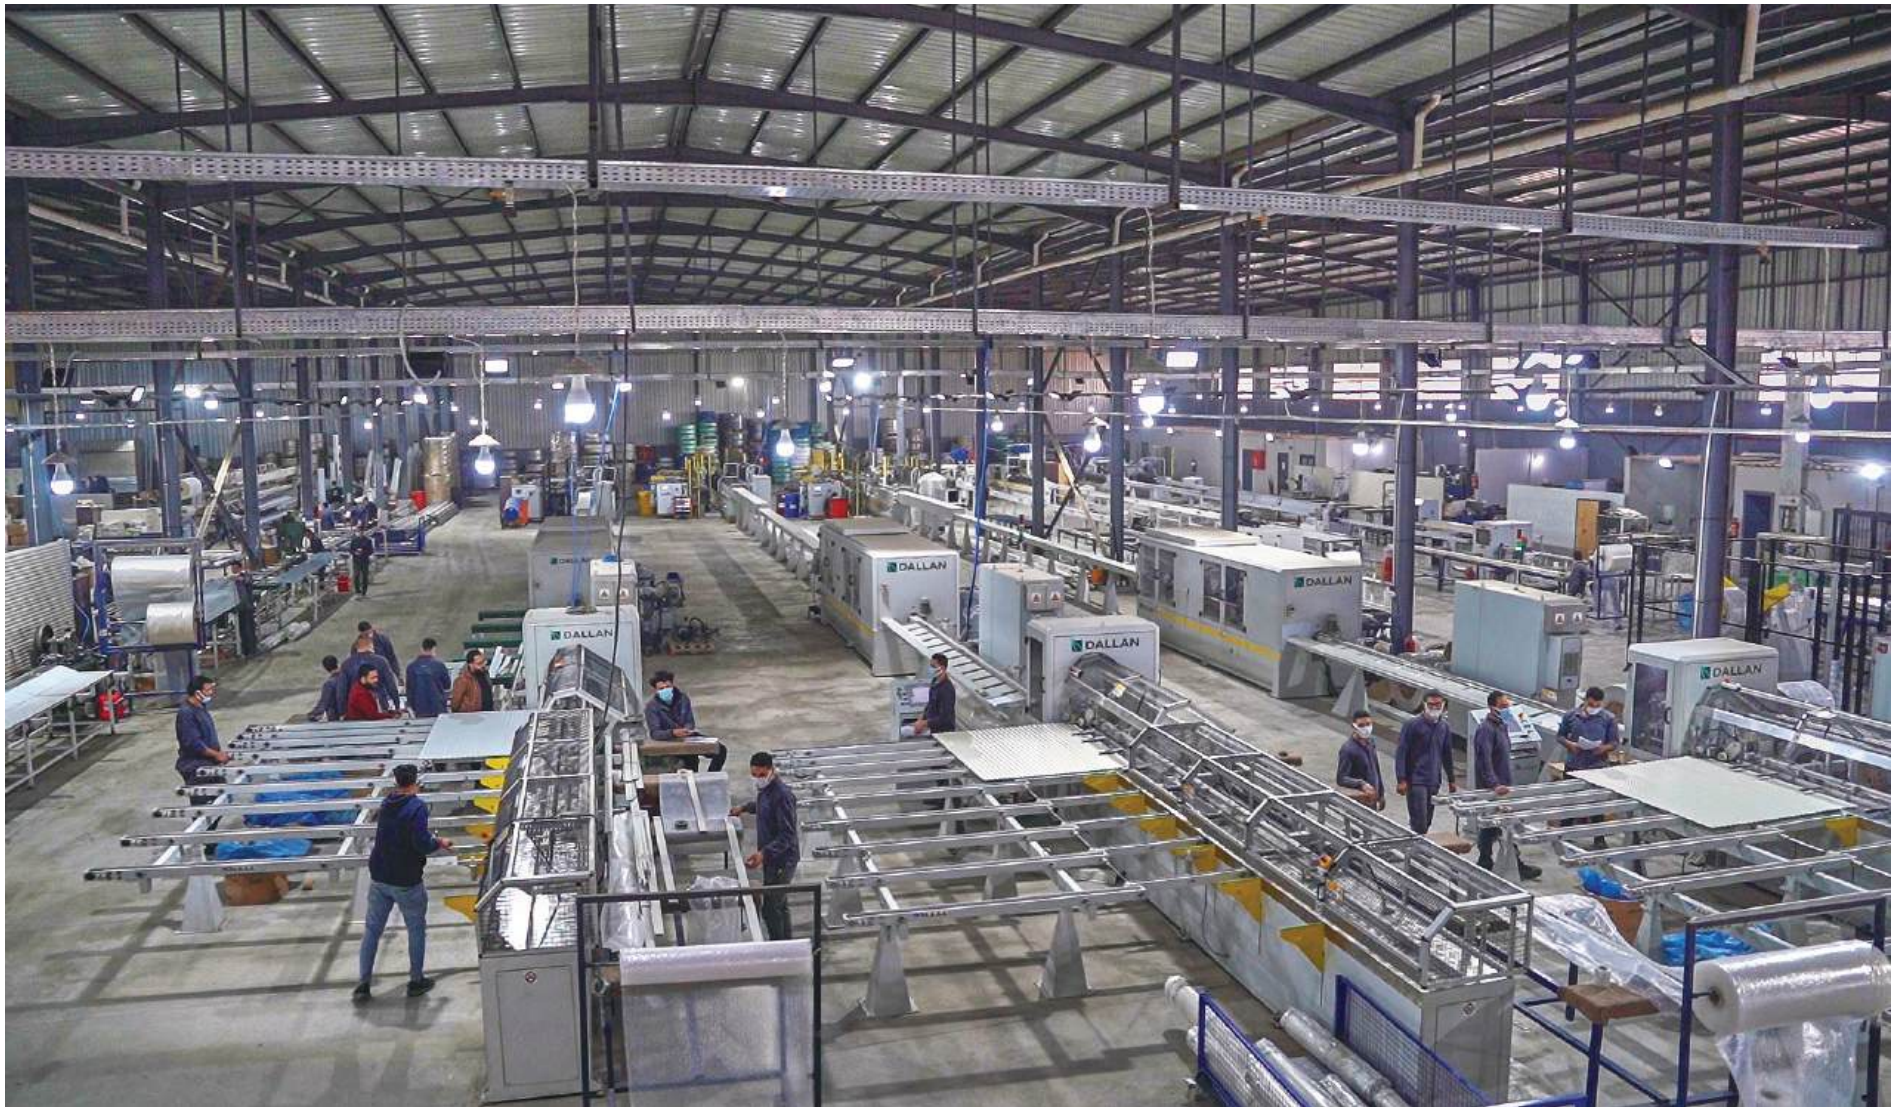


A person wearing a blue long-sleeved shirt with a logo on the sleeve is working on a rolling shutter mechanism. The background is a factory or workshop with various equipment and structures. The entire image has a blue color overlay.

Foam Injected Security Rolling Shutter

Product Catalogue

NGSS
NEW GENERATION SHUTTER

5



Product Specs

Zinconium Thickness	0.46 mm	سمك الزنكونيوم
Slat height	50 mm	مقاس الشريحة
Maximum recommended width (High Density Foam)	5 m	اقصي عرض (فوم عالي الكثافة)
Weight (Normal density)	10.8 kg/m ²	الوزن للمتر
No. of slats LMT / Height	20 slats	عدد الشرائح للمتر
locking type	Plastic lock	نوع التحبيس

البيانات التقنية


اختيار مقاس الصندوق (وفقا للارتفاع)

Boxes Size مقاس العلب	Tube 6 cm طنبور 6 سم	Tube 7 cm طنبور 7 سم	Tube 9 cm طنبور 9 سم
18 cm	125 cm	100 cm	—
20.5 cm	150 cm	150 cm	100 cm
22.5 cm	250 cm	240 cm	150 cm
25 cm	300 cm	300 cm	240 cm
30 cm	400 cm	400 cm	300 cm



Color: Dark Gray
Code: 7015

اللون: رمادي غامق
الكود: 7015



Color: Beige
Code: 1013

اللون: بيج فاتح
الكود: 1013





Color: White
Code: 9010

اللون: ابيض
الكود: 9010



ZINC 5.5

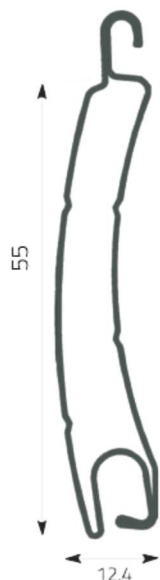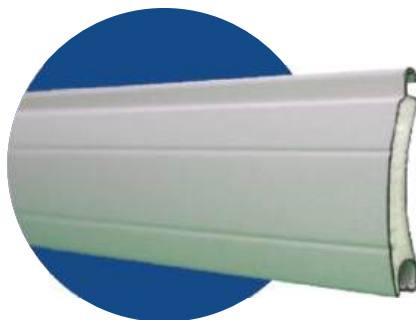

Product Specs

Zinconium Thickness	0.46 mm مم	سمك الزنكونيوم
Slat height	55 mm مم	مقاس الشريحة
Maximum recommended width	5 m م	اقصى عرض (فوم عادي)
Weight (Normal density)	8.6 kg/m ² كجم/م ²	الوزن للمتر (فوم عادي)
No. of slats LMT / Height	18.18 slats شريحة	عدد الشرائح للمتر
locking type	Plastic lock حبسة بلاستيك	نوع التحبيس

اختيار مقاس الصندوق (وفقا للارتفاع) Recommended box size (according to height)


Boxes Size مقاس العلب	Tube 6 cm + Ring طنبور 6 سم + رينج	Tube 7 cm طنبور 7 سم	Tube 9 cm طنبور 9 سم
16.5 cm سم	90 cm سم	90 cm سم	—
18 cm سم	140 cm سم	140 cm سم	—
20.5 cm سم	215 cm سم	215 cm سم	180 cm سم
22.5 cm سم	255 cm سم	255 cm سم	235 cm سم
25 cm سم	330 cm سم	330 cm سم	295 cm سم



Color: Black
Code: 9005 اللون: اسود
الكود: 9005



Color: DarkGray اللون: رمادي غامق
Code: 7015 الكود: 7015




Color: Beige اللون: بيج
Code: 1013 الكود: 1013



Color: White اللون: ابيض
Code: 9010 الكود: 9010



NEW ZINCONIUM



Product Specs


Zinconium Thickness	0.46 mm	سمك الزنكونيوم
Slat height	50 mm	مقاس الشريحة
Maximum recommended width (High Density Foam)	5 m	اقصي عرض (فوم عالي الكثافة)
Weight high density	10.8 kg/m ²	الوزن للمتر
No. of slats LMT / Height	20 slats	عدد الشرائح للمتر
locking type	Plastic lock	نوع التحبيس

Recommended box size (according to height) (وفقا للارتفاع)

Boxes Size مقاس العلب	Tube 6 cm طنبور 6 سم	Tube 7 cm طنبور 7 سم	Tube 9 cm طنبور 9 سم
18 cm	125 cm	100 cm	—
20.5 cm	150 cm	150 cm	100 cm
22.5 cm	250 cm	240 cm	150 cm
25 cm	300 cm	300 cm	240 cm
30 cm	400 cm	400 cm	300 cm



Color: Dark Gray
Code: 7015
اللون: رمادي غامق
الكود: 7015




Color: Beige
Code: 1013
اللون: بيج فاتح
الكود: 1013



Color: White
Code: 9010
اللون: ابيض
الكود: 9010



SEC 3.9

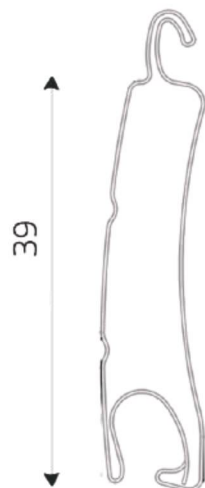

39
10

Product Specs

Zinconium Thickness	0.46 mm مم	سمك الزنكونيوم
Slat height	39 mm مم	مقاس الشريحة
Maximum recommended width	4.00 m م	اقصي عرض (فوم عادي)
Weight (Normal density)	9.5 kg/m ² كجم/م ²	الوزن للمتر (فوم عادي)
No. of slats LMT / Height	25.5 slats شريحة	عدد الشرائح للمتر
locking type	Plastic lock حبسة بلاستيك	نوع التحبيس

اختيار مقاس الصندوق (وفقا للارتفاع)

Boxes Size مقاس العلب	Tube 6 cm طنبور 6 سم	Tube 7 cm طنبور 7 سم	Tube 9 cm طنبور 9 سم
15 cm سم	90 cm سم	80 cm سم	—
16.5 cm سم	110 cm سم	100 cm سم	—
18 cm سم	150 cm سم	140 cm سم	120 cm سم
20.5 cm سم	230 cm سم	225 cm سم	180 cm سم
22.5 cm سم	270 cm سم	260 cm سم	230 cm سم
25 cm سم	400 cm سم	380 cm سم	300 cm سم
30 cm سم	450 cm سم	450 cm سم	380 cm سم




Color: Brown
Code: 8019

اللون: بني
الكود: 8019



Color: DarkGray
Code: 7015

اللون: رمادي غامق
الكود: 7015



Color: Beige
Code: 1013

اللون: بيج
الكود: 1013



Color: White
Code: 9010

اللون: ابيض
الكود: 9010







A blue-tinted photograph of an industrial aluminum rolling mill. Large metal rollers are visible on the left, and long, flat sheets of aluminum are being processed and moving towards the right. The scene is dimly lit, emphasizing the metallic textures and industrial environment.

Aluminium Rolling Shutter

Product Catalogue

SAFE 5.5

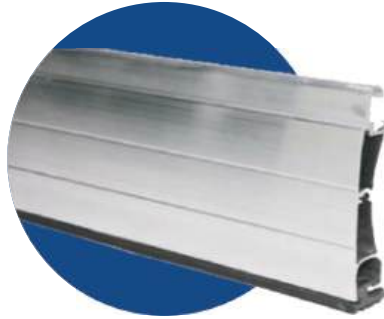

Product Specs

Aluminum Thickness	1 mm	مم	سمك الألومنيوم
Slat height	55 mm	مم	مقاس الشريحة
Maximum recommended width	5 m	م	اقصي عرض
Weight	8.5 kg/m ²	كجم/م ²	الوزن للمتر
No. of slats LMT / Height	19 slats	شريحة	عدد الشرائح للمتر
locking type	Plastic lock	حبسة بلاستيك	نوع التحبيس

اختيار مقاس الصندوق (وفقا للارتفاع) Recommended box size (according to height)


Boxes Size مقاس العلب	Tube 6 cm طنبور 6 سم	Tube 7 cm طنبور 7 سم	Tube 9 cm طنبور 9 سم
18 cm سم	100 cm سم	90 cm سم	—
20.5 cm سم	185 cm سم	170 cm سم	100 cm سم
22.5 cm سم	200 cm سم	190 cm سم	160 cm سم
25 cm سم	250 cm سم	245 cm سم	210 cm سم
30 cm سم	350 cm سم	350 cm سم	300 cm سم



Primary color is **Silver** and any color can be painted
اللون الأساسي فضي ويمكن طلاؤه أي لون



M.SAFE 41.45

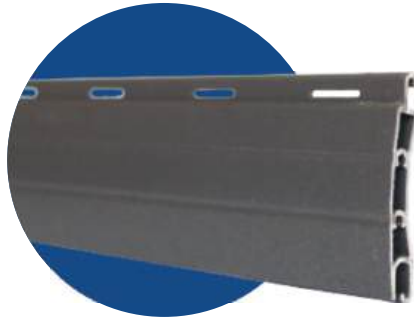

Product Specs

Aluminum Thickness	1 mm مم	سمك الألومنيوم
Slat height	41.45 mm مم	مقاس الشريحة
Maximum recommended width	4 m م	اقصي عرض
Weight	7.7 kg/m ² كجم/م ²	الوزن للمتر
No. of slats LMT / Height	24 slats شريحة	عدد الشرائح للمتر
locking type	Plastic lock حبسة بلاستيك	نوع التحبيس

اختيار مقاس الصندوق (وفقا للارتفاع) Recommended box size (according to height)

Boxes Size مقاس العلب	Tube 6 cm طنبور 6 سم	Tube 7 cm طنبور 7 سم	Tube 9 cm طنبور 9 سم
16.5 cm سم	130 cm سم	110 cm سم	—
18 cm سم	200 cm سم	180 cm سم	—
20.5 cm سم	260 cm سم	240 cm سم	220 cm سم
22.5 cm سم	300 cm سم	290 cm سم	280 cm سم
25 cm سم	340 cm سم	340 cm سم	380 cm سم



Primary color is **Silver** and any color can be painted
اللون الأساسي فضي ويمكن طلاؤه أي لون








Boxes For Rolling Shutter


DOMINO BOX

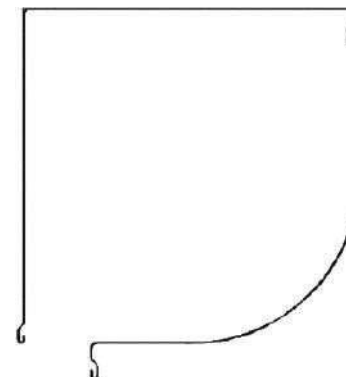

Size

- 150 mm
- 165 mm
- 180 mm
- 205 mm
- 225 mm
- 250 mm
- 300 mm

Colors



Color: Beige
Code: 1013

اللون: بيج
الكود: 1013



Color: White
Code: 9010

اللون: ابيض
الكود: 9010




Color: Dark Beige
Code: 1015

اللون: بيج غامق
الكود: 1015



Color: Dark Gray
Code: 7015

اللون: رمادي غامق
الكود: 7015



Color: Black
Code: 9005

اللون: اسود
الكود: 9005


Note: Any color can be implemented upon request

Domino Side Box




Size 150 mm
165 mm
180 mm
205 mm
225 mm

Colors



Color: Beige
Code: 1013

اللون: بيج
الكود: 1013



Color: White
Code: 9010

اللون: ابيض
الكود: 9010




Color: Dark Beige
Code: 1015

اللون: بيج غامق
الكود: 1015



Color: Dark Gray
Code: 7015

اللون: رمادي غامق
الكود: 7015




Color: Black
Code: 9005

اللون: اسود
الكود: 9005


Note: Any color can be implemented upon request

MEGA BOX

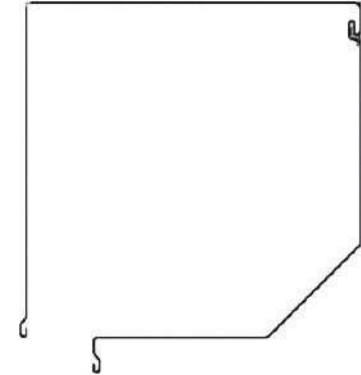


Size	150 mm
	165 mm
	180 mm
	205 mm
	225 mm
	250 mm
	300 mm

Colors



Color: Beige
Code: 1013

اللون: بيج
الكود: 1013



Color: White
Code: 9010

اللون: ابيض
الكود: 9010



Color: Dark Beige
Code: 1015

اللون: بيج غامق
الكود: 1015



Color: Dark Gray
Code: 7015

اللون: رمادي غامق
الكود: 7015




Color: Black
Code: 9005

اللون: اسود
الكود: 9005


Note: Any color can be implemented upon request

Mega Side Box

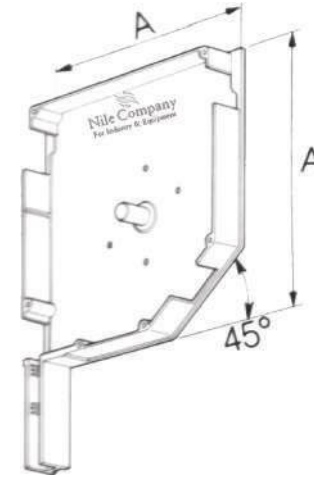

Size 165 mm
180 mm
205 mm
225 mm
250 mm

Colors



Color: Beige
Code: 1013

اللون: بيج
الكود: 1013



Color: White
Code: 9010

اللون: ابيض
الكود: 9010




Color: Dark Beige
Code: 1015

اللون: بيج غامق
الكود: 1015



Color: Dark Gray
Code: 7015

اللون: رمادي غامق
الكود: 7015




Color: Black
Code: 9005

اللون: اسود
الكود: 9005


Note: Any color can be implemented upon request

DELTA BOX

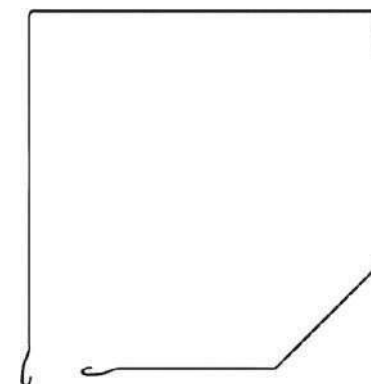

Size	150 mm
	165 mm
	180 mm
	205 mm
	225 mm
	250 mm
	300 mm

Colors



Color: Beige
Code: 1013

اللون: بيج
الكود: 1013



Color: White
Code: 9010

اللون: ابيض
الكود: 9010




Color: Dark Beige
Code: 1015

اللون: بيج غامق
الكود: 1015



Color: Dark Gray
Code: 7015

اللون: رمادي غامق
الكود: 7015




Color: Black
Code: 9005

اللون: اسود
الكود: 9005


Note: Any color can be implemented upon request

Delta Side Box

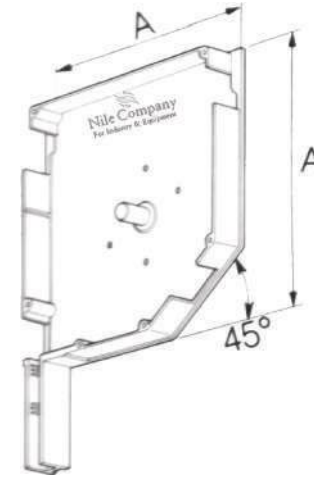

Size 165 mm
180 mm
205 mm
225 mm
250 mm

Colors



Color: Beige
Code: 1013

اللون: بيج
الكود: 1013



Color: White
Code: 9010

اللون: ابيض
الكود: 9010




Color: Dark Beige
Code: 1015

اللون: بيج غامق
الكود: 1015



Color: Dark Gray
Code: 7015

اللون: رمادي غامق
الكود: 7015




Color: Black
Code: 9005

اللون: اسود
الكود: 9005


Note: Any color can be implemented upon request

Square Box

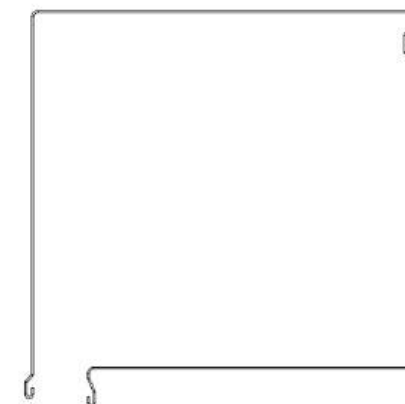

Size	150 mm
	165 mm
	180 mm
	205 mm
	225 mm
	250 mm

Colors



Color: Beige
Code: 1013

اللون: بيج
الكود: 1013



Color: White
Code: 9010

اللون: ابيض
الكود: 9010




Color: Dark Beige
Code: 1015

اللون: بيج غامق
الكود: 1015



Color: Dark Gray
Code: 7015

اللون: رمادي غامق
الكود: 7015



Color: Black
Code: 9005

اللون: اسود
الكود: 9005

Note: Any color can be implemented upon request


Square Side Box



Size

- 150 mm
- 165 mm
- 180 mm
- 205 mm
- 225 mm
- 250 mm

Colors



Color: Beige
Code: 1013

اللون: بيج
الكود: 1013



Color: White
Code: 9010

اللون: ابيض
الكود: 9010




Color: Dark Beige
Code: 1015

اللون: بيج غامق
الكود: 1015



Color: Dark Gray
Code: 7015

اللون: رمادي غامق
الكود: 7015




Color: Black
Code: 9005

اللون: اسود
الكود: 9005


Note: Any color can be implemented upon request

Square R Box

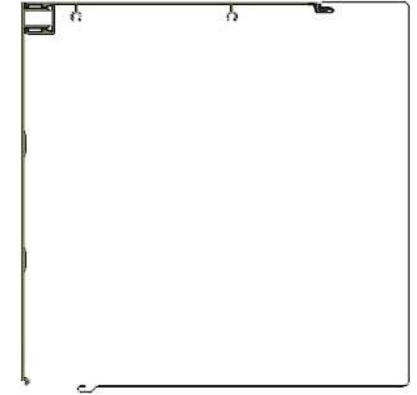

Size 205 mm

Colors



Color: Beige
Code: 1013

اللون: بيج
الكود: 1013



Color: White
Code: 9010

اللون: ابيض
الكود: 9010




Color: Dark Beige
Code: 1015

اللون: بيج غامق
الكود: 1015



Color: Dark Gray
Code: 7015

اللون: رمادي غامق
الكود: 7015




Color: Black
Code: 9005

اللون: اسود
الكود: 9005


Note: Any color can be implemented upon request

Square R Side Box

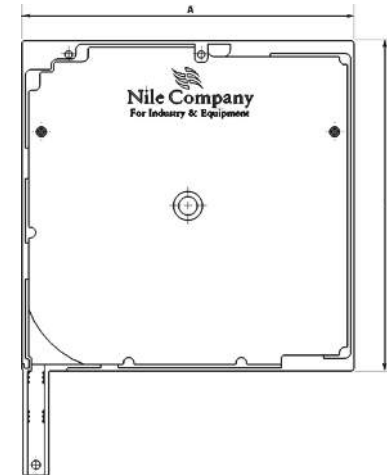


Size 205 mm

Colors



Color: Beige
Code: 1013

اللون: بيج
الكود: 1013



Color: White
Code: 9010

اللون: ابيض
الكود: 9010




Color: Dark Beige
Code: 1015

اللون: بيج غامق
الكود: 1015



Color: Dark Gray
Code: 7015

اللون: رمادي غامق
الكود: 7015



Color: Black
Code: 9005

اللون: اسود
الكود: 9005




Note: Any color can be implemented upon request








Tubes Product And Side Channel Usage Guide


Nile Tubes

Type	Octagonal Tube 4cm	Octagonal Tube 6cm	Octagonal Tube 7cm	Octagonal Tube 9 cm	Round Tube 10.2cm
Dimension mm	A = 40 S = 0.6	A = 60 S = 0.6 Available S=0.8 by request	A = 70 S = 1.2 Available S=1.5 by request	A = 9 S = 1.5	A = 102 S = 2.5
Design					


Nile Side Channel

Type	Dimension (mm)			Design
Small Side Channel 8cm	A = 80	C = 30	S = 20	
Mid Side Channel 8cm	A = 80	C = 30	S = 23	
BK Side Channel 8cm	A = 80	C = 30	S = 25	
Wide Side Channel 8cm	A = 80	C = 30	S = 26.6	

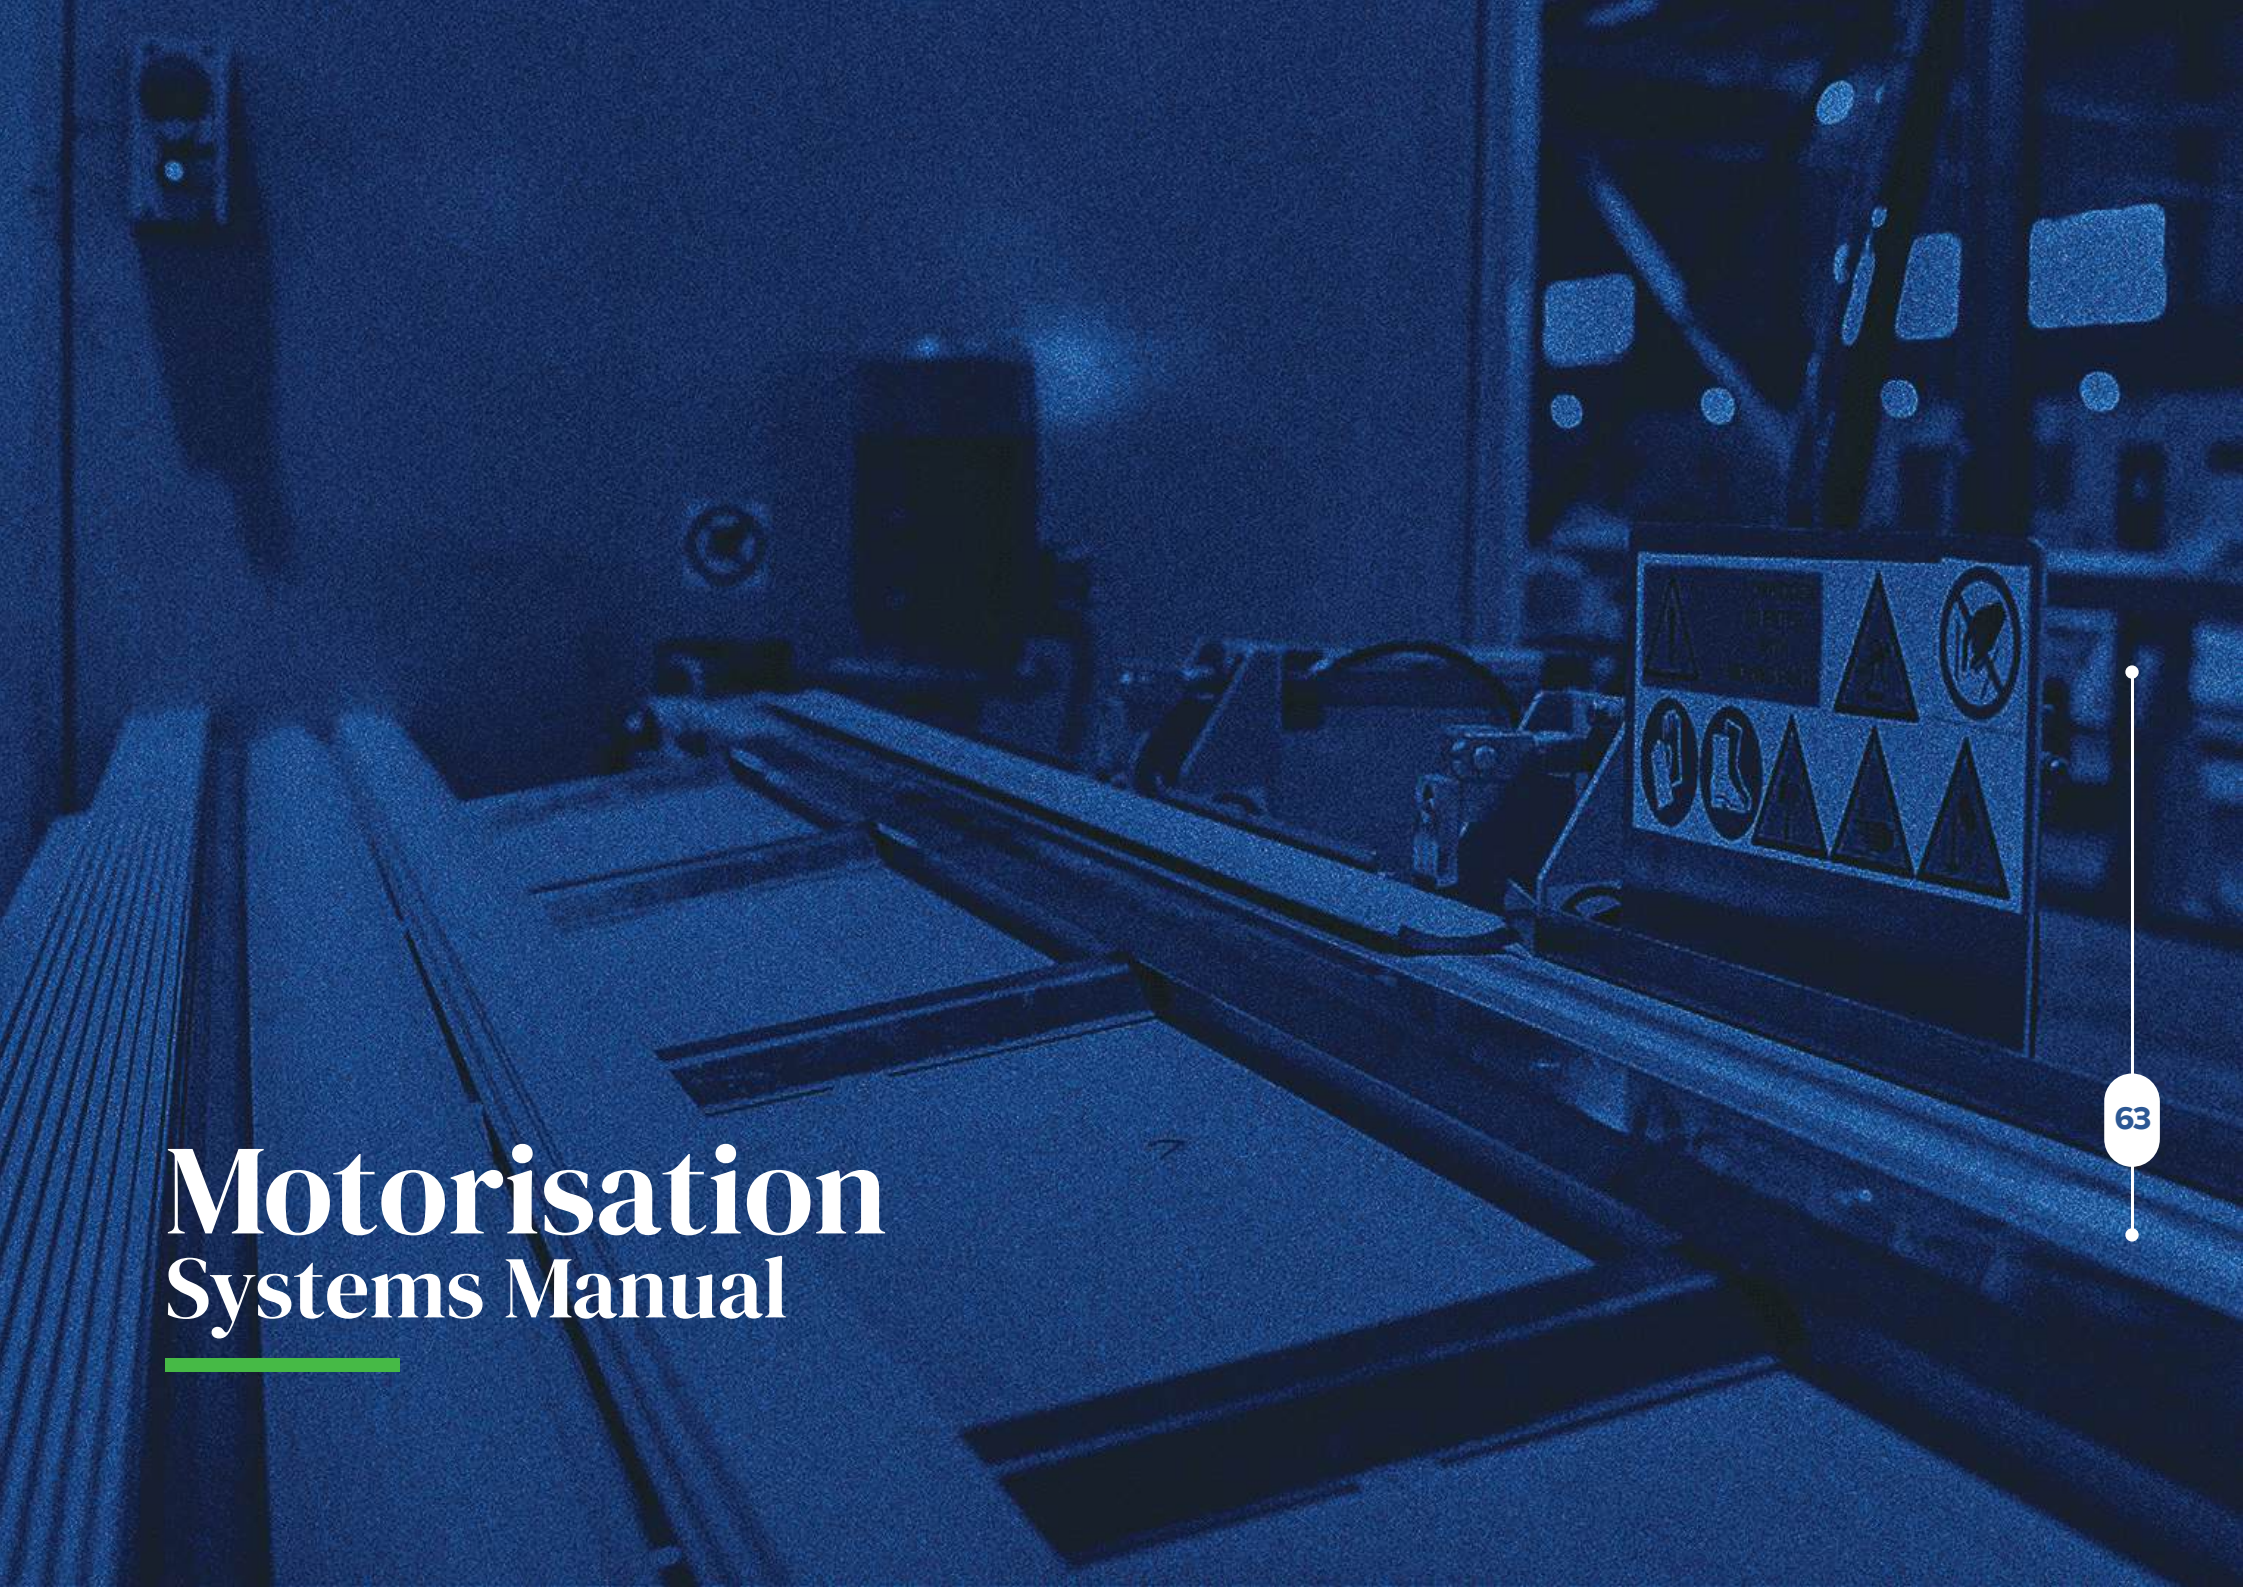

A blue-tinted photograph of an industrial machine, possibly a conveyor system or a material processing unit. The machine features a series of parallel metal tracks or rollers extending from the foreground into the background. On the right side, there is a safety sign with multiple warning symbols, including a triangle with an exclamation mark, a circle with a diagonal line, and a circle with a hand. The overall scene is dimly lit, with the blue tint giving it a technical and industrial feel.

Motorisation Systems Manual

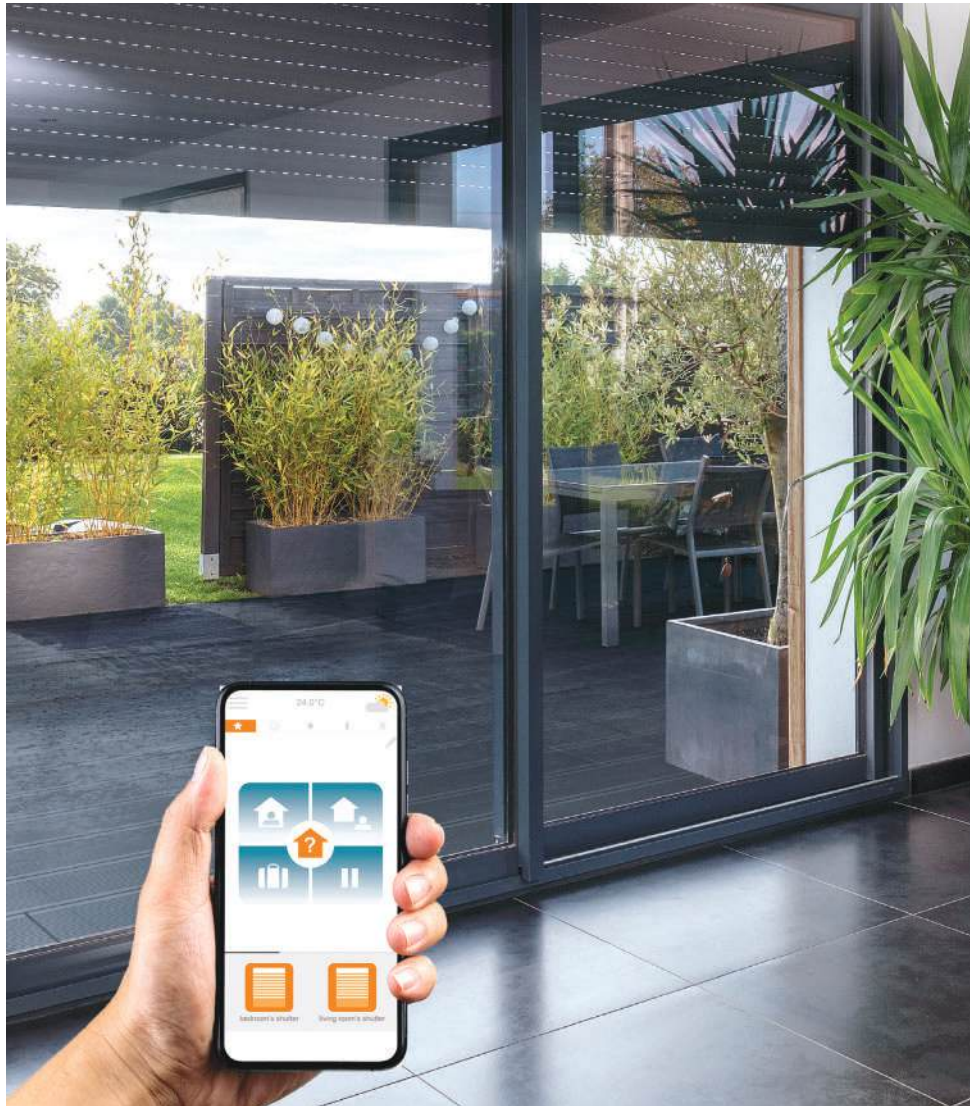

somfy®

Somfy Motor selection

Range 1: 230V / 50Hz

إختيار المحرك سومفي

مجموعة ١: ٢٣٠ ف / ٥٠ هرتز



Remote io
1 ch x 4 ch



Tahoma



Connexoon



Smove io

Ø50




Technical data

Power supply	230 V / 50 Hz (207 V - 253 V)
Operating temperature	Normal use: -10°C to +40°C Exceptional use (20% of the lifetime not simultaneously): -25°C to +70°C
Cable type	Only unpluggable VVF 2,5m
Insulation class	Class I
Protection rating index	IP 44
Thermal time	4 minutes
Homologations	CE + VDE + NF

Settings


Manual	Compatible with soft links
Limit Switch Unit	Rapid adjustment, 46 turns

4 threads by wire



Section = 0,75 mm²

Star head



Overall length (with head)



Performance

Torque (N.m)	Nominal Speed (rpm)	Overall length (mm)	Rated power (W)	Rated current (A)	Weight (kg)
6	12	440	90	0,35	1,7
8	12	440	90	0,35	1,7
10	12	440	90	0,45	1,7
15	12	440	120	0,45	1,9
20	12	440	140	0,65	2,1
30	12	440	160	0,75	2,2
40	12	440	240	1,1	2,5



Ø60




Technical data

Power supply	230 V / 50 Hz (207 V - 244 V)
Operating temperature	Normal use: -10°C to +40°C Exceptional use (20% of the lifetime not simultaneously): -25°C to +70°C
Cable type	Pluggable RFF or VVF
Insulation class	Class I
Protection rating index	IP 44
Thermal time	4 minutes
Homologations	CE + VDE + NF

Settings


Manual	Compatible with soft links
Limit Switch Unit	Rapid adjustment, 35 turns

3 threads by wire



Section = 0,75 mm²

Star head



Overall length (with head)



Performance

Torque (N.m)	Nominal Speed (rpm)	Overall length (mm)	Rated power (W)	Rated current (A)	Weight (kg)
60	12	620	240	1,05	4,7
80	12	620	290	1,25	4,9
100	12	665	350	1,5	5,4
120	12	665	400	1,8	5,6

Selection Guide

Roller shutter slat type

35x5 mm | 37x8 mm | 40x8 mm | 45x8 mm

Height	Tube Diam (mm)																				
Up to 1.5 m	40	9 4 Nm	19 9 Nm	29 13 Nm																	
	60	13 6 Nm	17 8 Nm	21 10 Nm	32 15 Nm	42 20 Nm	53 25 Nm	64 30 Nm	74 35 Nm	85 40 Nm	106 50 Nm										
	70	12 6 Nm	16 8 Nm	20 10 Nm	30 15 Nm	40 20 Nm	50 25 Nm	60 30 Nm	70 35 Nm	80 40 Nm	100 50 Nm	110 55 Nm	120 60 Nm	140 70 Nm	160 80 Nm	170 85 Nm	200 100 Nm	240 120 Nm			
	89	11 6 Nm	15 8 Nm	18 10 Nm	27 15 Nm	37 20 Nm	46 25 Nm	55 30 Nm	64 35 Nm	73 40 Nm	92 50 Nm	101 55 Nm	110 60 Nm	128 70 Nm	147 80 Nm	156 85 Nm	183 100 Nm	220 120 Nm			
From 1.5 to 2.5 m	40	8 4 Nm	18 9 Nm	26 13 Nm																	
	60	11 6 Nm	15 8 Nm	18 10 Nm	28 15 Nm	37 20 Nm	46 25 Nm	55 30 Nm	64 35 Nm	73 40 Nm	92 50 Nm										
	70	11 6 Nm	14 8 Nm	18 10 Nm	27 15 Nm	36 20 Nm	45 25 Nm	54 30 Nm	63 35 Nm	72 40 Nm	90 50 Nm	99 55 Nm	108 60 Nm	126 70 Nm	144 80 Nm	153 85 Nm	190 100 Nm	216 120 Nm			
	89	10 6 Nm	13 8 Nm	17 10 Nm	25 15 Nm	33 20 Nm	42 25 Nm	50 30 Nm	59 35 Nm	67 40 Nm	84 50 Nm	92 55 Nm	100 60 Nm	117 70 Nm	134 80 Nm	142 85 Nm	167 100 Nm	201 120 Nm			
From 2.5 to 3.5 m	40	7 4 Nm	15 9 Nm	21 13 Nm																	
	60	10 6 Nm	13 8 Nm	16 10 Nm	24 15 Nm	32 20 Nm	40 25 Nm	48 30 Nm	55 35 Nm	63 40 Nm	79 50 Nm										
	70	9 6 Nm	12 8 Nm	15 10 Nm	23 15 Nm	31 20 Nm	39 25 Nm	46 30 Nm	54 35 Nm	62 40 Nm	77 50 Nm	85 55 Nm	93 60 Nm	108 70 Nm	123 80 Nm	131 85 Nm	154 100 Nm	185 120 Nm			
	89	8 6 Nm	11 8 Nm	14 10 Nm	21 15 Nm	28 20 Nm	35 25 Nm	42 30 Nm	50 35 Nm	57 40 Nm	71 50 Nm	78 55 Nm	85 60 Nm	99 70 Nm	113 80 Nm	120 85 Nm	142 100 Nm	170 120 Nm			

Roller shutter slat type

45x11 mm | 52x13 mm | 53x14 mm | 55x13 mm | 60x14 mm

	Height	Tube Diam (mm)																					
Up to 1.5 m	60	6 Nm	9 Nm	12 Nm	15 Nm	23 Nm	30 Nm	38 Nm	46 Nm	53 Nm	61 Nm	76 Nm	50 Nm										
	70	6 Nm	9 Nm	12 Nm	15 Nm	23 Nm	30 Nm	38 Nm	45 Nm	53 Nm	60 Nm	75 Nm	83 Nm	91 Nm	106 Nm	121 Nm	128 Nm	151 Nm	181 Nm				
	89	6 Nm	8 Nm	11 Nm	14 Nm	21 Nm	28 Nm	35 Nm	42 Nm	50 Nm	57 Nm	71 Nm	78 Nm	85 Nm	99 Nm	113 Nm	120 Nm	142 Nm	170 Nm				
	102		M	A	R	I	N	E	R		56	50 Nm	55 Nm	60 Nm	70 Nm	80 Nm	85 Nm	100 Nm	120 Nm	168 Nm	210 Nm	280 Nm	350 Nm
From 1.5 to 2.5 m	60	6 Nm	8 Nm	11 Nm	14 Nm	20 Nm	27 Nm	34 Nm	41 Nm	47 Nm	54 Nm	68 Nm											
	70	6 Nm	8 Nm	11 Nm	14 Nm	20 Nm	26 Nm	33 Nm	39 Nm	46 Nm	53 Nm	67 Nm	72 Nm	79 Nm	92 Nm	105 Nm	112 Nm	131 Nm	158 Nm				
	89	6 Nm	8 Nm	10 Nm	15 Nm	20 Nm	25 Nm	31 Nm	37 Nm	44 Nm	50 Nm	64 Nm	69 Nm	75 Nm	87 Nm	100 Nm	106 Nm	125 Nm	150 Nm				
	102		M	A	R	I	N	E	R	49	50 Nm	55 Nm	60 Nm	70 Nm	80 Nm	85 Nm	100 Nm	120 Nm			184 Nm	245 Nm	306 Nm
From 2.5 to 3.5 m	60	6 Nm	8 Nm	10 Nm	13 Nm	19 Nm	25 Nm	31 Nm	38 Nm	44 Nm	50 Nm	63 Nm											
	70	6 Nm	8 Nm	10 Nm	15 Nm	20 Nm	25 Nm	31 Nm	37 Nm	43 Nm	50 Nm	62 Nm	68 Nm	74 Nm	87 Nm	99 Nm	105 Nm	124 Nm	149 Nm				
	89	6 Nm	8 Nm	9 Nm	12 Nm	17 Nm	23 Nm	29 Nm	35 Nm	41 Nm	46 Nm	58 Nm	64 Nm	69 Nm	81 Nm	93 Nm	98 Nm	116 Nm	139 Nm				
	102		M	A	R	I	N	E	R	44	50 Nm	55 Nm	60 Nm	70 Nm	77 Nm	86 Nm	94 Nm	110 Nm	132 Nm	165 Nm	220 Nm	275 Nm	



simu

Simu Motor selection

Range 1: 230V / 50Hz

إختيار المحرك سيمو

مجموعة ١: ٢٣٠ ف / ٥٠ هرتز



 simu-Hz[®]
technology



T5



Technical data

Power supply	230 V / 50 Hz
Thermal cut-out	4 minutes (230V)
Progressive end-limit	With a capacity of 28 rounds
Protection index	IP 44
Power cable 230V	2.5 meters (4x0,75 mm ² wires, white H05 VVF)
Base diameter of the crown	for Ø50 x 1.5 mm round tube
Motor head thickness	22.8 mm
4 Cycles per day	Non consecutive
Insulation class	Class I motor
Compliance	European standards (EN) + IEC standards (international standards)

T5 Motor – 12 rpm / Cable 2.5m

DESCRIPTION	TORQUE	SPEED	POWER	CURRENT	La	Lb	Lc
T5 - 6/12	6 Nm	12 rpm	90 W	0,40 A	485 mm	498 mm	521 mm
T5 - 10/12	10 Nm	12 rpm	100 W	0,45 A	485 mm	498 mm	521 mm
T5 - 15/12	15 Nm	12 rpm	120 W	0,50 A	485 mm	498 mm	521 mm
T5 - 20/12	20 Nm	12 rpm	140 W	0,65 A	505 mm	518 mm	541 mm
T5 - 30/12	30 Nm	12 rpm	160 W	0,75 A	585 mm	598 mm	621 mm
T5 - 40/12	40 Nm	12 rpm	240 W	1,10 A	585 mm	598 mm	621 mm
T5 - 50/12	50 Nm	12 rpm	240 W	1,10 A	585 mm	598 mm	621 mm

T6



Technical data

Power supply	230 V / 50 Hz
Thermal cut-out	4 minutes (230V)
Progressive end-limit	With a capacity of 28 rounds
Protection index	IP 44
Power cable 230V	2.5 meters (4x0,75 mm ² wires, white H05 VVF)
Base diameter of the crown	for Ø50 x 1.5 mm round tube
Motor head thickness	22.8 mm
4 Cycles per day	Non consecutive
Insulation class	Class I motor
Compliance	European standards (EN) + IEC standards (international standards)

T6 Motor

DESCRIPTION	TORQUE	SPEED	POWER	CURRENT	WEIGHT
T6 - 60/12	60 Nm	12 rpm	240 W	1,05 A	4,43 kg
T6 - 80/12	80 Nm	12 rpm	290 W	1,25 A	4,64 kg
T6 - 100/12	100 Nm	12 rpm	350 W	1,5 A	4,97 kg
T6 - 120/12	120 Nm	12 rpm	400 W	1,8 A	5,17 kg

Nile&asa

Package Configuration



Single Package
Customized




End Limit
Adjustment Tool



Warnings & Motor
Instruction Leaflets – Language TBD


Cable Type:

H05 VVF 4 x 0,75 L. 2,5 m – White



Ø50

Mechanical Wired Tubular Motor With Star Head

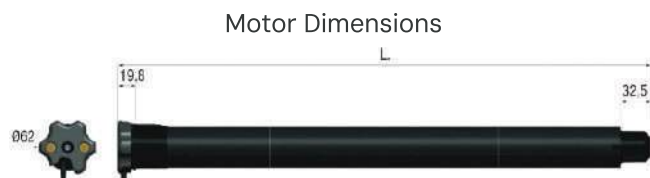


Technical Features

Code	Description	Torque	Speed	LS Rounds	Consumption	Power Supply	Prot. Degree	Length	Motor Weight
To be created	Nile Mec 6/17	6 Nm	17 Rpm	28	100 W	230 V ~ / 50 Hz	IP 44	526 mm	1,68 Kg
To be created	Nile Mec 10/17	10 Nm	17 Rpm	28	120 W	230 V ~ / 50 Hz	IP 44	526 mm	1,72 Kg
To be created	Nile Mec 20/17	20 Nm	17 Rpm	28	190 W	230 V ~ / 50 Hz	IP 44	576 mm	1,89 Kg
To be created	Nile Mec 30/17	30 Nm	17 Rpm	28	240 W	230 V ~ / 50 Hz	IP 44	576 mm	1,98 Kg
To be created	Nile Mec 40/17	40 Nm	17 Rpm	28	240 W	230 V ~ / 50 Hz	IP 44	576 mm	1,98 Kg
To be created	Nile Mec 50/12	50 Nm	12 Rpm	28	240 W	230 V ~ / 50 Hz	IP 44	576 mm	1,98 Kg

Ø60

Mechanical Wired Tubular Motor

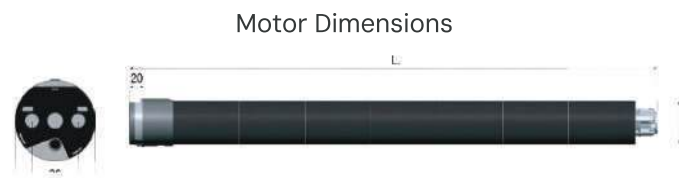

Technical Features									
Code	Description	Torque	Speed	LS Rounds	Consumption	Power Supply	Prot. Degree	Length	Motor Weight
To be created	Nile Mec 80/12	80 Nm	12 Rpm	23	290 W	230 V ~ / 50 Hz	IP 44	695 mm	4,45 Kg
To be created	Nile Mec 120/12	120 Nm	12 Rpm	23	400 W	230 V ~ / 50 Hz	IP 44	695 mm	4,70 Kg

AM45 / AM60


Mechanical Limit AC Motor

230V AC 50/60HZ

A-OK




Cable Type:
AC 230V 50/60Hz



AM45

Mechanical Limit AC Motor

230V AC 50/60HZ



Mechanical limit switch & max limit circle is 55 circles



Reliable and easy adjustment of the limit switches



Quite design, Lower to 45dB



Double breaking design with patent

Technical Features



Model No.	Rated Torque	Rated RPM	Motor Diameter	Tube Length A	Rated Voltage	Rated Power	Rated Current	IP Class
AM45-10/17	10 Nm	17 Rpm	45 mm	440 mm	230 V	135 W	0.6 A	IP 44
AM45-20/17	20 Nm	17 Rpm	45 mm	482 mm	230 V	170 W	0.7 A	IP 44
AM45-30/17	30 Nm	17 Rpm	45 mm	502 mm	230 V	200 W	0.9 A	IP 44
AM45-40/12	40 Nm	12 Rpm	45 mm	502 mm	230 V	200 W	0.9 A	IP 44
AM45-50/12	50 Nm	12 Rpm	45 mm	520 mm	230 V	250 W	1.1 A	IP 44
AM45-65/12	65 Nm	12 Rpm	45 mm	520 mm	230 V	330 W	1.5 A	IP 44

A-OK®

AM45

Short Mechanical Limit AC Motor

230V AC 50/60HZ

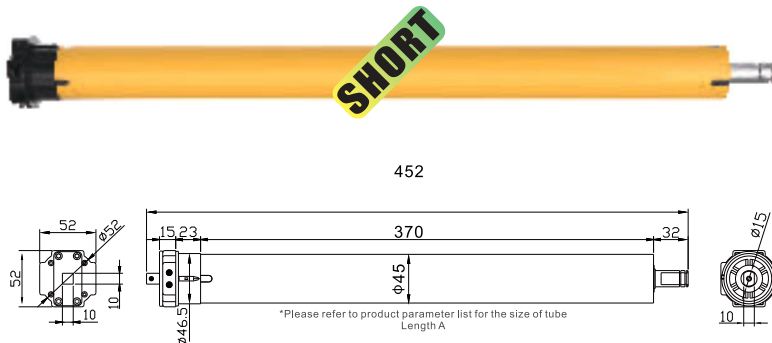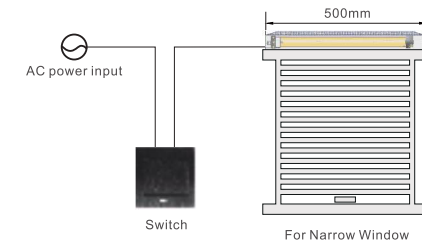

Mechanical limit switch & max limit circle is 29 circles



Reliable and easy adjustment of the limit switches



Quite design, Lower to 45dB



Double breaking design with patent



Suitable for the narrow width roller shutter



ROLLER SHUTTER



EXTERNAL
SCREEN


Technical Features

Model No.	Rated Torque	Rated RPM	Motor Diamter	Tube Length A	Rated Voltage	Rated Power	Rated Current	IP Class
AM45-10/17-S	10 Nm	17 Rpm	45 mm	370 mm	230 V	115 W	0.5 A	IP 44

A-OK®

Nile Control

Effortless Control



Receiver



Remote
6 channel



Remote
1 channel

Receiver



Technical Specification

Operating Range: can cover an apartment / a floor area of 150m² (indoor)

Input : AC 100-240V 50/60Hz

Output : 10A Resistive Load

Color : White

Works with ON Remotes

Works with any 3 wire system Motor (please consult a professional before wiring)

Warranty : 5-years warranty.

Remote 1 Channel

Technical Specification

Operating Range: can cover an apartment / a floor area of 150m² (indoor)

Battery: 3 Volt Battery (CR2032 or CR2430)

Battery Included

Channels: 1 channel

Works with ON receivers

Color: White

Main Features

Up, Down, Stop

Favorite position by holding on the stop button

Up + Down : Swap Shutter direction

Pairing: Easy sync via back button (no tools required)

Warranty: 5-years warranty





Remote 6 Channel

Technical Specification

Operating Range: can cover an apartment / a floor area of 150m² (indoor)

Battery: 3 Volt Battery (CR2032 or CR2430)

Battery Included

Channels: 6 channel

Works with ON receivers

Color: White

Main Features

Up, Down, Stop

Favorite position by holding on the stop button

Channel selector to switch between the 6 channels

Up + Down : Swap Shutter direction

Pairing : Easy sync via back button (no tools required)

Warranty : 5-years warranty.

AION Wifi Shutter Switch-Schneider INNOVATIONS



Effortless Control

Advanced Home Automation at Your Fingertips.

Category : Shutter Switch

Standard : Schneider

Color : White - Black

Touch Control

App Control (AION Home)

Automation Schedule



Voice Control

Share Control with Family




Motor Accessories

Wheel & Crown for A.Ok




Octa 60 mm
Code:419006004

Wheel & Crown & Convert for A.Ok




**Convert from 60mm
to 70 mm**
Code:419006009

Wheel




Octa 90 mm
Code:419006010

Crown




Octa 90 mm
Code:419006011


wheel



Octa 60 mm
Code:401006005




Octa 70 mm
Code:401006010



Octa 90 mm
Code:401006032


crown



Octa 60 mm
Code:401006006



Octa 70 mm
Code:401006009




Octa 90 mm
Code:401006033



**Converter 60 mm
To 70mm**
Code:401006016


Accessories

Holders




Flaexi Holder

Product Size	Product Code
13cm Flexible	701002001
17cm Flexible	701002002
19cm Flexible	701002003

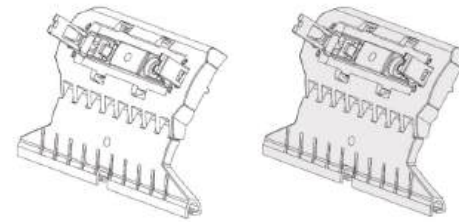

Safety Holder


Product Size	Product Code
Direct 40 mm	701002028
Direct 55 mm	701002029
Indirect 40 mm	701002030



Zinconium Holder


Product Size	Product Code
	701002046

Caps & Guide




Plastic Cap

Product Size	Product Code
Clinched 60 mm	303011007
Clinched 40 mm	30301106

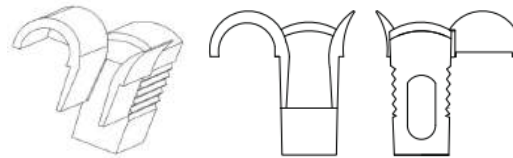


Entry guide

Name	Product Code
WIDE	303010023
8 CM	303010024




Exterior Cap With Round Pivot

Product Size	Product Code
Clinched 70 mm	701001013
Clinched 60 mm	701001001
Clinched 40 mm	701001002

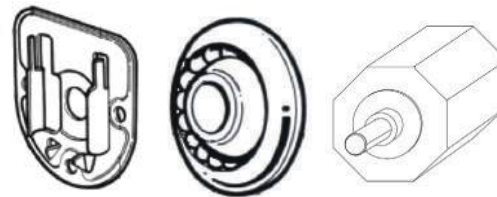

Exterior Cap with Bracket To screw & Ball bearing

Product Size	Product Code
4cm	701001016
6cm	701001017
7cm	701001018



Entry guide Delta


Name	Product Code
DELTA	303010023



Plate for Standard end cap with Exterior cap & Ball bearing

Product Size	Product Code
6cm	701001032
7cm	701001033


Strap



Outside Tape Box with Strap

Product Code: 6010030


Product Colour	Code
WHITE	601003002
BROWN	601003004
DARK BEIGE	601003005



Outside Tape Box with Strap large

Product Code: 6010030


Product Colour	Code
WHITE	601003002
BROWN	601003004



Entry guide

Product Code: 60100


Product Size	Code
Large	601001009
Small	601002008

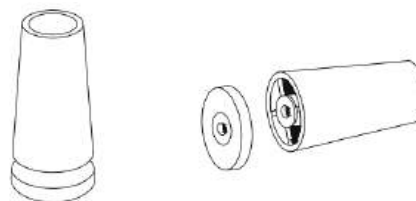

Plastic Stopper

Product Code: 7010010

Product Colour	Code
WHITE	701001009
BROWN	701001010
DARK BEIGE	701001015



Pulley Strap

Product Code: 60100

Name	Product Code
60mm Metal wide strap	601001010
60mm Metal narrow strap	601002009
40mm Metal narrow strap	601002010
40mm plastica narrow strap	601002011
60mm plastica wide strap	601001036


Gear Box



Gear Box

Product Code: 5010020


Product Type	Code
Plastic	501002001

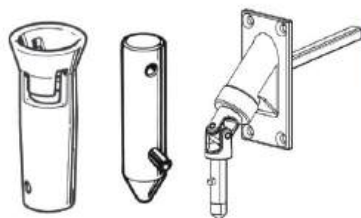

Joints

Product Code: 50100200


Product Sizes	Code
Joints Wide	501002003
Joints Tight	501002005



Plastic Stopper

Product Code: 7010010

Product Color	Code
WHITE	701001009
BROWN	701001010
DARK BEIGE	701001015

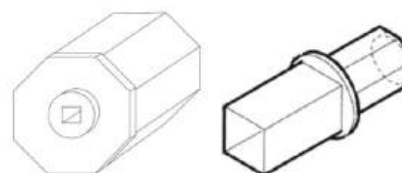

Hexagonal Pivot and Cap with Square Hole

Product Code: 5010010

Product Sizes	Code
Cap with square hole 60 mm	501001005
Cap with square hole 40 mm	501001006
PRODUCT DESCRIPTION	Code
Hexagonal pivot	501002004



Handle

Product Code: 501012003



Handle Lock


Product Code: 501001003

Others



**Bracket for
(Somfy-Nile&asa-A.ok)**

Product Code
401006004




**Butterfly Base for
(Somfy -Nile&asa-A.ok)**

Product Code
303011011



**Bracket A.ok
max : 140 Nm**

Product Code
419006007



**Bracket Simu
max : 50 Nm**

Product Code
303011011



**Bracket Simu
max : 120 Nm**

Product Code
303011011



**Butterfly Base for
Simu**


Product Code
303011014

Others



Plastic Ring

Product Size	Product Code
Ring 60 mm	701002071
Ring 70 mm	701002072



Support axe for tube 90 mm

Product Code
701001051



Bearing for tube 90 mm

Product Code
701001050



Contact Us

 +20 121 233 3383

 info@nilecompany.net

 [nilecompany.net](https://www.facebook.com/nilecompany.net)

 www.nilecompany.net

 EL Obour Industrial City Block 20025 / 11-12
Cairo – Egypt



30 years of excellence
٣٠ عاماً من الريادة

